


## TECHNICAL DATA SHEET

### Eurovent FLEX ULTRA

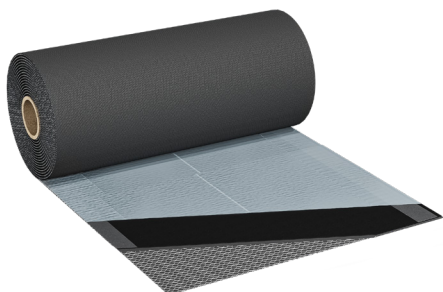

Eurovent® FLEX ULTRA chimney tape, a self-adhesive profiled flashing tape used for sealing around chimneys, dormers, and roof windows. It is made of two layers of thermoplastic material reinforced with a stretchable aluminium mesh, combined with butyl adhesive and additional butyl strips with increased adhesive strength, protected by silicone paper.

PARAMETER	UNIT	VALUE
Material composition		Thermoplastic material with aluminium mesh and butyl adhesive
Length	[m]	5
Roll width	[mm]	280
Roll thickness	[mm]	2,0 (+/- 0,2)
Colour	[RAL]	anthracite 7021
Tensile strength	[N/mm]	
- force at 50% elongation longitudinal		≥ 2,0
- force at 10% elongation transverse		≥ 4,0
Adhesion to steel	[N/10 mm]	
- tape underside		≥ 1,0
- additional butyl strips		≥ 6,5
Temperature resistance with maintained tightness	[°C]	from 40 to 80
Water tightness		No water penetration
Application temperature	[°C]	from 5 to 40
Weather resistance		Resistant
Carton	[pcs.]	1
Pallet	[pcs.]	72



## Eurovent **FLEX ULTRA**

**Application:** Used for all types of sealing and connections within the roof area, particularly for chimney, dormer, and roof window flashing. It is also applied for connections between roof surfaces and walls. Suitable for use on most roofing types — ceramic and concrete tiles, metal roof tiles, trapezoidal sheets, profiled aluminium sheets, etc.

**Installation:** For about 24 hours before application, the tape should be stored at room temperature (from 5 °C to 25 °C). During application, the temperature should be above 5 °C (recommended above 10 °C). The surface to which the tape is applied must be dry and free from dust and grease. Remove the protective liner, place the tape in the desired position, and press firmly.

**Safety:** The product is not intended for consumption. Avoid contact with eyes. In case of skin irritation, consult a doctor.

**Storage / transport:** The product should be stored in dry, covered rooms, free from moisture and direct UV radiation. Under heavy load, the product may deform or become damaged. Stacking with other heavy products is not recommended (both during transport and storage). Transport should be carried out using covered vehicles, with the product secured against damage. During transport, applicable safety regulations must be observed. The product should be protected from chemical agents, especially solvent-based substances, as they may reduce its technical properties or cause permanent damage.

The product is covered by warranty provided that the guidelines specified in the technical data sheet are strictly observed. The manufacturer reserves the right to refuse warranty claims in case of non-compliance with these guidelines.

*Contained information, advice and guidance is given based on our knowledge, researches, experience and in good faith. We are not responsible for the consequences of improper or incorrect use of our products. Each user of this material will ensure in every possible way, including an examination of the final product in the relevant conditions, the suitability of supplied materials to achieve the objectives pursued by him.*

Product information can be found on the website: [www.eurovent.pl](http://www.eurovent.pl)

Update date: 28/04/2026